

# ■ S9.42.D6 HEUSSER-Inset Lock

## Tray depth 42 mm / flush-mounted handle



**S9.42.D6** U-handle right side



### Purpose of use

Flush mounted U- handle for sports halls, sliding doors, pass doors and fire safety doors. Shallow installation depth in the lock area thanks to the two-stage design.

### Design

Material	Stainless steel 1.4404   AISI 316L
Surface	Polished
Socket	9 mm
U-handle	build in

### Order details


Spacing	S9.42.D6.0 blank S9.42.D6.2 RZ-74, 78, 94 mm S9.42.D6.3 PZ-72, 78, 88, 92 mm
Direction	right/left

### Accessories



Screw set for opposite screwing.

### Custom versions


Custom finishes are available in RAL, NCS, or metallic colors, painted or powder-coated. Additional options are available upon request.

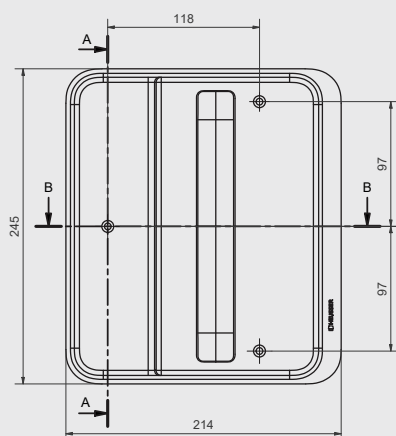

A-A (1:2)



### Cutouts for cylinders



ø22 mm Round cylinder    ø17 mm Profile cylinder

